

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

## ACTIVE SAFETY



OSAS



USAS



OPAS



SKUDO

**easu** MANIFOLD p. 241



\*  $F_{1i} =$

Isothermal end force at 100% Cu p. 18

\*\*  $F_{1p} =$

Polytrophic end force at 100% Cu

		$^{\circ}F$ 32 - 176	$^{\circ}C$ 0 - 80	$\Delta P$ $\pm 0,33 \%/^{\circ}C$	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 31,17 cm <sup>2</sup> 4.831 in <sup>2</sup>	<b>SPM</b> ~ 80 - 100 (at 20°C)	<b>Max Speed</b> 0,8 m/s	<b>Maintenance kit</b> 39BMKE04700B						
CODE		$^{\circ}F$	$^{\circ}C$	$\Delta P$	<b>P max</b>	<b>P min</b>	<b>S</b>	<b>SPM</b>	<b>Max Speed</b>	<b>Maintenance kit</b>						
PHASING OUT from 08/2012	NEW															
KE 4700 - 010 - A	KE 4700 - 010 - B	10	0.39	80	3.15	70	2.76	4675	10510	$\pm 5\%$						
KE 4700 - 016 - A	KE 4700 - 016 - B	16	0.63	106	4.17	90	3.54	7467	16788	9112	20485	153,0	9.33	1,85	4.08	✓
KE 4700 - 025 - A	KE 4700 - 025 - B	25	0.98	135	5.31	110	4.33	7780	17491	9622	21631	224,0	13.66	2,10	4.63	✓
KE 4700 - 032 - A	KE 4700 - 032 - B	32	1.26	167	6.57	135	5.31	7447	16742	9079	20410	308,0	18.79	2,39	5.27	✓
KE 4700 - 040 - A	KE 4700 - 040 - B	40	1.57	200	7.87	160	6.30	7360	16547	8939	20096	393,0	23.97	2,68	5.91	✓
KE 4700 - 050 - A	KE 4700 - 050 - B	50	1.97	240	9.45	190	7.48	7326	16469	8883	19970	496,0	30.26	3,03	6.68	✓
-	KE 4700 - 065 - B	65	2.56	273	10.75	208	8.19	7926	17818	9862	22171	565,0	34.47	3,30	7.28	✓

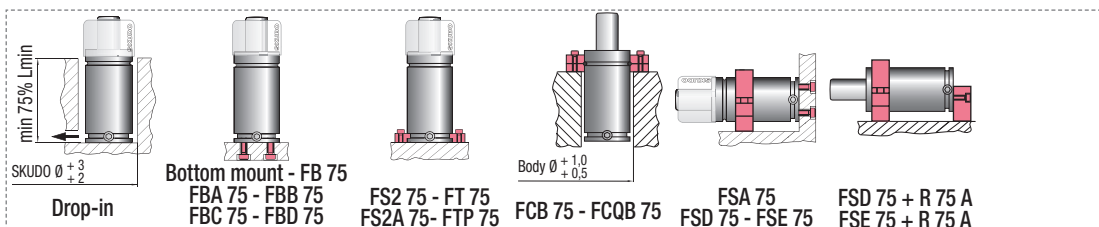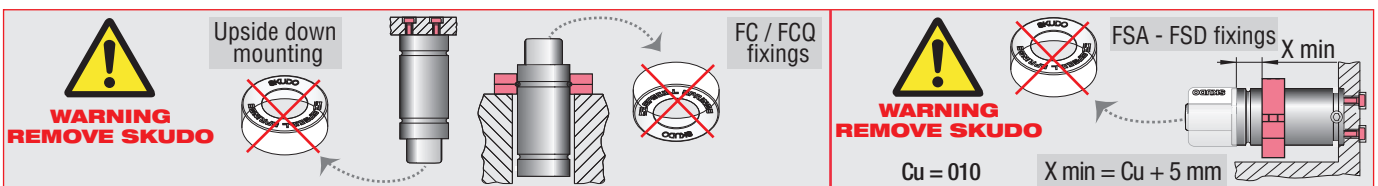

## HOW TO ORDER

p. 193

## INSTALLATION GUIDELINE

p. 203